

14 Configurations

W1000 / D1000 / H2300mm

UPD01



1000mm

UPD02



UPD03



W1600 / D1200 / H2300mm

UPD04



1600mm

UPD05



UPD06



UPD07



UPD08



W2200 / D1200 / H2300mm

UPD09



2200mm

UPD10



W2200 / D1600 / H2300mm

UPD11



UPD12



W2200 / D2200 / H2300mm



UPD13



UPD14





= Digital Control Panel

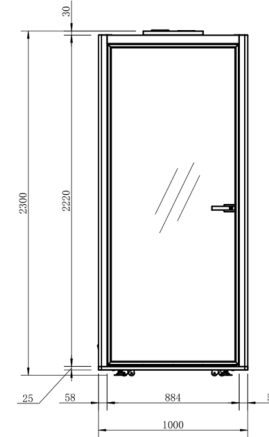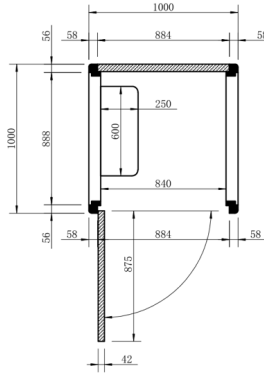



Product Specs

- **Outer Dimension (mm) :** W1000*D1000*H2300, **Inner Dimension (mm) :** 840*900*2120
- **Work surface size:** 600*250*25mm, Height: 1100mm
- **Outer sheet metal panel:** 0.8mm Sheet metal, Electrostatic powder coating (with 3mm thick vibration-damping panels attached)
- **Insulated material:** Steel frame + 40mm thick sound-absorbing cotton, with soundproofing cotton (80kg/m³ density) filled inside the columns
- **Inner panel:** 9mm PET felt panel
- **Flooring:** 25mm board, Carpet*1, leveling feet*4, Swivel caster*4
- **Back glass:** 10mm Tempered soundproof glass with black aluminum alloy frame
- **Glass door:** 4+6mm Tempered Laminated Soundproof Glass with Black Aluminum Alloy Frame
- **Power:** CN/US/UK/EU/UNIVERSAL Voltage: 110-240v
- **Socket:** Power socket*1, Type-A*1, Type-C*1
- **Ventilation fans*2** (Proximity-activated sensor) : Airflow Rate 150m³/H
- **Lights:** LED (Proximity-activated sensor) , Indicator light*1 (optional) , Color temperature: 6000K
- **Cables:** 1.5m cable length with 13A plug
- **Hardware:** Stainless steel lock, Door handle, Dual-Axis Mounted Pivot Hinge (top & bottom anchored) 、 Door Stopper
- **net weight :** 300kg , **Gross Weight :** 378kg, **Packaging(outer dimension):** 2280*1100*630mm, Volume: 1.58m³

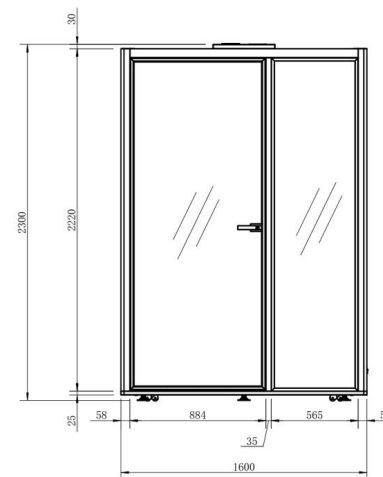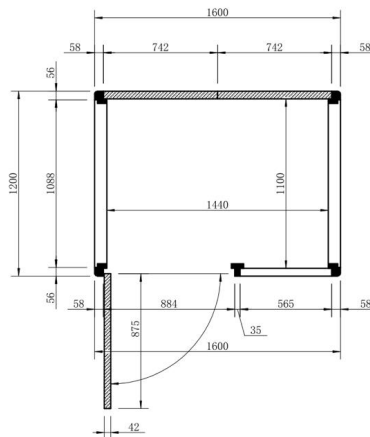

Product Specs

- **Outer Dimension (mm)** : W1600*D1200*H2300, **Inner Dimension (mm)** : 1440*1000*2120
- **Outer sheet metal panel**: 0.8mm Sheet metal, Electrostatic powder coating (with 3mm thick vibration-damping panels attached)
- **Insulated material**: Steel frame + 40mm thick sound-absorbing cotton, **with soundproofing cotton (80kg/m³ density) filled inside the columns**
- **Inner panel**: 9mm PET felt panel
- **Flooring**: 25mm board, Carpet*1, leveling feet*5, Swivel caster*4
- **Back glass**: 10mm Tempered soundproof glass with black aluminum alloy frame
- **Glass door**: 4+6mm Tempered Laminated Soundproof Glass with Black Aluminum Alloy Frame
- **Power**: CN/US/UK/EU/UNIVERSAL Voltage: 110-240v
- **Socket**: Power socket*1, Type-A*1, Type-C*1
- **Ventilation fans***2 (Proximity-activated sensor) : Airflow Rate 150m³/H
- **Lights**: LED (Proximity-activated sensor) , Indicator light*1 (optional) , Color temperature: **5000K**
- **Cables**: 1.5m cable length with 13A plug
- **Hardware**: Stainless steel lock, Door handle, Dual-Axis Mounted Pivot Hinge (top & bottom anchored) 、 Door Stopper
- **net weight** : 460kg , **Gross Weight** : 558kg, **Packaging(outer dimension)**: **2240*1300*860mm**, Volume: 2.5m³

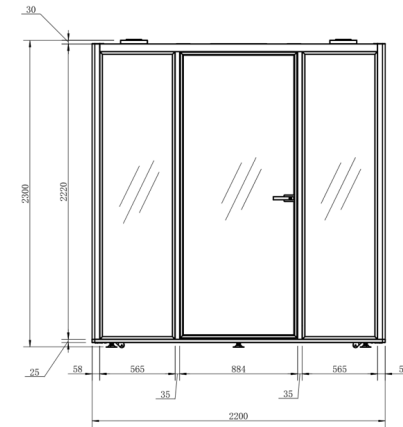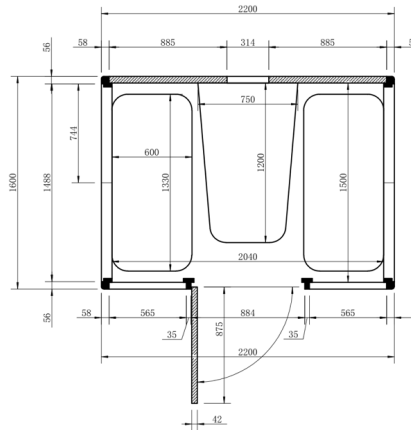

Product Specs

- **Outer Dimension (mm) :** W2200*D1600*H2300, **Inner Dimension (mm) :** 2040*1500*2120
- **Outer sheet metal panel:** 0.8mm Sheet metal, Electrostatic powder coating (with 3mm thick vibration-damping panels attached)
- **Insulated material:** Steel frame + 40mm thick sound-absorbing cotton, **with soundproofing cotton (80kg/m³ density) filled inside the columns**
- **Inner panel:** 9mm PET felt panel
- **Flooring:** 25mm board, Carpet*1, leveling feet*12, Swivel caster*8
- **Back glass:** 10mm Tempered soundproof glass with black aluminum alloy frame
- **Glass door:** 4+6mm Tempered Laminated Soundproof Glass with Black Aluminum Alloy Frame
- **Power:** CN/US/UK/EU/UNIVERSAL Voltage: 110-240v
- **Socket:** Power socket*1, Type-A*1, Type-C*1
- **Ventilation fans*4** (Proximity-activated sensor) : Airflow Rate 300m³/H
- **Lights:** LED (Proximity-activated sensor) , Indicator light*1 (optional) , Color temperature: **5000K**
- **Cables:** 1.5m cable length with 13A plug
- **Hardware:** Stainless steel lock, Door handle, Dual-Axis Mounted Pivot Hinge (top & bottom anchored) 、 Door Stopper
- **net weight :** 685kg , **Gross Weight :** 850kg, **Packaging(outer dimension):** **2280*970*780mm*2**, Volume: 3.45m³

Product Specs



- **Outer Dimension (mm) :** W2200*D2200*H2300, **Inner Dimension (mm) :** 2040*2100*2120
- **Outer sheet metal panel:** 0.8mm Sheet metal, Electrostatic powder coating (with 3mm thick vibration-damping panels attached)
- **Insulated material:** Steel frame + 40mm thick sound-absorbing cotton, **with soundproofing cotton (80kg/m³ density) filled inside the columns**
- **Inner panel:** 9mm PET felt panel
- **Flooring:** 25mm board, Carpet*1, leveling feet*12, Swivel caster*8
- **Back glass:** 10mm Tempered soundproof glass with black aluminum alloy frame
- **Glass door:** 4+6mm Tempered Laminated Soundproof Glass with Black Aluminum Alloy Frame
- **Power:** CN/US/UK/EU/UNIVERSAL Voltage: 110-240v
- **Socket:** Power socket*1, Type-A*1, Type-C*1
- **Ventilation fans*4 (Proximity-activated sensor) :** Airflow Rate 300m³/H
- **Lights:** LED (Proximity-activated sensor) , Indicator light*1 (optional) , Color temperature: **5000K**
- **Cables:** 1.5m cable length with 13A plug
- **Hardware:** Stainless steel lock, Door handle, Dual-Axis Mounted Pivot Hinge (top & bottom anchored) 、 Door Stopper
- **net weight :** 795kg , **Gross Weight :** 990kg, **Packaging(outer dimension):** **2280*1200*860mm, 2280*1200*680mm**, Volume: 4.21m³

STEEL

(Sheet metal powder-coating finishes)

[Exclusively for Sound-proof pod]

No	Color Code	Description	Surface Finishes	Samples (mm)
1	VM675	Tech Black	gloss	120*60*0.8
2	VM602	Earth Brown	gloss	120*60*0.8
3	VM998	Shadow Grey	gloss	120*60*0.8
4	VM004	Gloss Grey	gloss	120*60*0.8
5	VM686	Khaki	gloss	120*60*0.8
6	VM605	Dusty Rose	gloss	120*60*0.8
7	VM711A	Pure White	gloss	120*60*0.8
8	VM690	Turquoise	matt	120*60*0.8
9	VM691	Golden Wheat	matt	120*60*0.8
10	VM692	Coral Red	matt	120*60*0.8

Gloss Finished



VM675_Tech Black



VM602_Earth Brown



VM998_Shadow Grey




VM004_Gloss Grey



VM686_Khaki



VM605_Dusty Rose



VM711A_Pure White

Matt Finished



VM690_Turquoise



VM691_Golden Wheat



VM692_Coral Red

PET (Polyester Fiber Acoustic Panel)

[Exclusively for Sound-proof pod]


No	Color Code	Description	Fire-Resistant
1	UDG2501	Dark Grey	Nonflammable
2	ULG2502	Light Grey	Nonflammable
3	UBG2503	Black	Nonflammable
4	UR2504	Red	Basic / Flammable
5	UP2505	Purple	Basic / Flammable
6	UY2506	Yellow	Basic / Flammable
7	UO2507	Orange	Basic / Flammable
8	UB2508	Blue	Basic / Flammable
9	UP2509	Pink	Nonflammable



UDG2501



ULG2502



UBG2503



UR2504



UP2505




UY2506



UO2507



UB2508



UP2509

FABRIC (Linen Fleece Fabric)

[Exclusively for Sound-proof pod]

No	Color Code	Applications
1	LE5200-02	Sheet Metal Based with Upholster、Sofa
2	LE5200-04	
3	LE5200-06	
4	LE5200-10	
5	LE5200-17	
6	LE5200-19	
7	LE5200-24	
8	LE5200-30	
9	LE5200-34	
10	LE5200-37	

No	Color Code	Applications
1	LE9140B-02	PET Board Based with Upholster、Sofa
2	LE9140B-06	
3	LE9140B-09	
4	LE9140B-15	
5	LE9140B-19	
6	LE9140B-22	
7	LE9140B-28	
8	LE9140B-36	
9	LE9140B-44	
10	LE9140B-49	



LE5200-02




LE5200-04




LE5200-06



LE5200-10



LE5200-17




LE5200-19




LE5200-24



LE5200-30



LE5200-34



LE5200-37



LE9140B-02



LE9140B-06



LE9140B-09



LE9140B-15



LE9140B-19



LE9140B-22



LE9140B-28



LE9140B-36



LE9140B-44



LE9140B-46

CARPET

[Exclusively for Sound-proof pod]


No	Color Code	颜色描述
1	UCP001	黑色
2	UCP002	深灰
3	UCP003	灰白



UCP001



UCP002

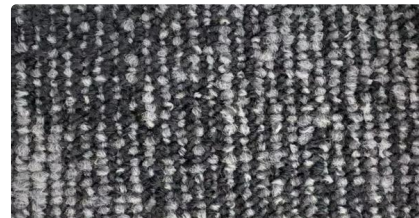

UCP003



【Lobby】



【Office】



[Office]



【Airport】



【Library】

【Common Area】

